PRODUCT RANGE



CONNECT WITH US ON SOCIAL MEDIA

FACEBOOK

INSTAGRAM



LINKEDIN



YOUTUBE




LVD PRODUCT RANGE

SHEET METALWORKING, OUR PASSION, YOUR SOLUTION

LVDGROUP.COM

LASER PUNCH BEND INTEGRATE

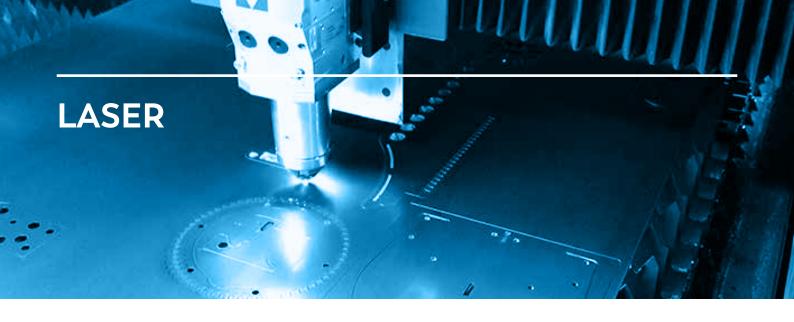

Phoenix FL



Dynamic fiber laser cutting system is the perfect all-round performer

- processes a wide range of ferrous and non-ferrous materials
- high wall-plug efficiency of laser source up to 40%
- · 6, 12 or 20 kW laser source
- sheet size formats: 3050 x 1525 mm, 4065 x 2035 mm, 6160 x 2035 mm
- Phoenix FL-6525: 6400 x 2500 mm (straight cutting) -6100 x 2000 mm (bevel cutting, bevel head optional)

Puma



Total laser cutting solution

- processes a wide range of material types and thicknesses
- automation-ready
- 3, 6, 12 or 20 kW laser source
- sheet size formats: 3050 x 1525 mm, 4065 x 2035 mm, 6160 x 2035 mm
- Puma 6525: 6400 x 2500 mm (straight cutting) 6100 x 2000 mm (bevel cutting, bevel head optional)

LaserTWO



Cost-efficient laser cutting

- · optional local or full covers, shuttle bed
- · 3, 6 or 12 kW laser source
- · sheet size format: 3050 x 1525 mm
- · optional Load-Assist automation (load only)



Taurus



Large-format fiber laser cutting machine

- · sheet width: 3200 mm
- · 12 or 20 kW laser source
- maximum cutting length (multiple sheets)
 straight cutting: 41,900 mm/bevel cutting: 41,500 mm
- · available with bevel head

Tube lasers



High-performance tube laser cutting machines


- · front loader standard
- · up to 6 kW
- · up to 250 mm square or round
- models/tube length: TL 8525/8200 mm (with bevel head), TL 2665/7925 mm

MOVit Automation solutions



Modular automation systems for peak efficiency

- · LA Load-Assist: loading and loading/unloading
- CT-L Compact Tower: loading, unloading and material/parts storage
- FA-L Flexible Automation: advanced load/unload systems
- TAS Tower Automation System: single or double-tower storage systems
- WAS Warehouse Automation System: customisable storage towers

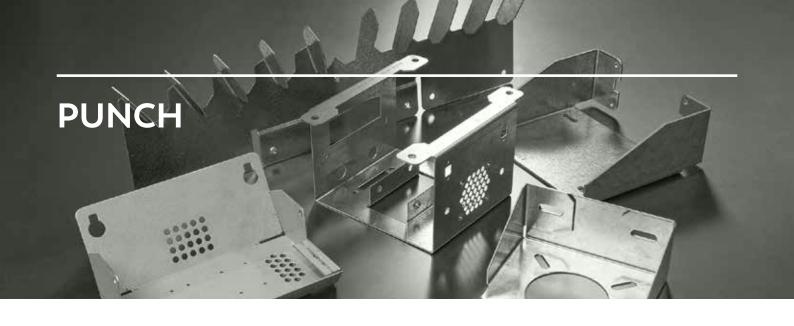

Strippit P



Cost-effective punch press suitable for cellular manufacturing and short production runs

- · flexible 33-station turret
- maximum hit rate: 300 hits/min on 25.4 mm and 650 hits/min on 1 mm centers
- punching force: 20 ton; max. material thickness: 6.35 mm
- sheet size formats: 1250 x 1250 mm, 1250 x 2500 mm, 1525 x 2500 mm

Strippit M



Large capacity and high-performance punch press, ideal for batch processing

- · large turret capacity: 47 stations
- maximum hit rate: 400 hits/min on 25.4 mm and 900 hits/min on 1 mm centers
- · punching force: 20 ton; max. material thickness: 6.35 mm
- sheet size formats: 1250 x 1250 mm, 1250 x 2500 mm, 1525 x 3050 mm

Strippit V



Punch press suitable for high tonnage and high production punching needs

- · large turret capacity: 48 stations
- maximum hit rate: 440 hits/min on 25.4 mm and 900 hits/min on 1 mm centers
- punching force: 30 ton; max. material thickness: 6.35 mm
- sheet size formats: 1250 x 2500 mm, 1525 x 3050 mm, 1525 x 5000 mm

Strippit VX



Highly flexible punching machine, expandable with indexable multitools

- · large turret capacity: 48 stations
- maximum hit rate: 530 hits/min on 25.4 mm and 920 hits/min on 1 mm centers
- punching force: 20 ton; max. material thickness: 6.35 mm
- sheet size formats: 1250 x 2500 mm, 1525 x 3050 mm

Strippit PX



Single-head punch press that can punch, bend, tap and form all on a single machine

- · 20 indexable tool stations, T-style compatible
- maximum hit rate: 505 hits/min on 25.4 mm and 910 hits/min on 1 mm centers
- · punching force: 20 ton; max. material thickness: 6.35 mm
- sheet size formats: 1250 x 2500 mm, 1525 x 3050 mm, 1525 x 5000 mm

Strippit PL - Punch Laser Combination



Punching advantages combined with the speed of fiber laser cutting

- · available in both turret and single-head technology
- \cdot 3 kW laser source 4 kW optional
- punching force: 20 ton for single head and 30 ton for turret punch press
- · sheet size format: 1525 x 3050 mm

ETM - Extended Tool Magazine



Increased tooling capacity and automatic tool change

- · 40 additional punch/die combinations
- · preload tools during operation
- · tool life monitoring
- · available for Strippit PX


MOVit Automation solutions



Automation systems for maximum productivity and process reliability

- · PA Push Autoload: loading/unloading
- CT-P Compact Tower: loading, unloading and material/parts storage
- FA-P Flexible Automation: advanced loading/unloading and part picking for PX models
- TAS Tower Automation System: single or double-tower storage systems
- WAS Warehouse Automation System: customisable storage towers



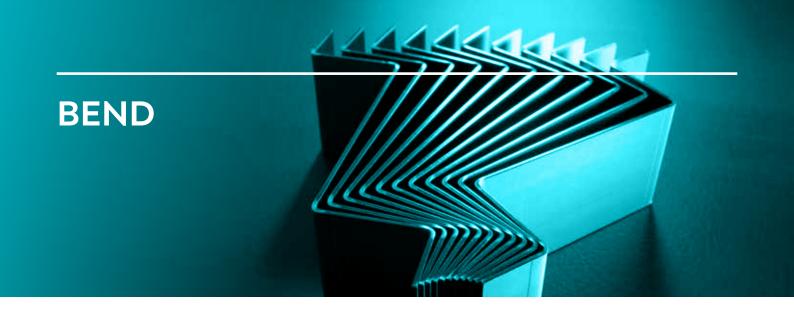

Dyna-Press



Electric-drive press brake efficiently bends small parts at high speeds

- · 4-axis back gauge, Dyna-Press Pro 5-axis back gauge
- · bending speeds up to 25 mm per second
- · bending capacities: 24 to 60 ton
- · bending lengths: 1250 to 2040 mm
- · Dyna-Press Pro available with Easy-Form® Laser

PPED



Practical and easy-to-use hydraulic press brake for general bending applications

- · 2- or 4-axis back gauge
- · CNC crowning available
- · bending capacities: 50 to 320 ton
- · bending lengths: 2000 to 4000 mm

PPEB/Easy-Form®



High-precision hydraulic press brakes for demanding applications

- · 2-, 5- or 6-axis backgauge
- · turbo hydraulics for high speed bending
- · Easy-Form® Laser adaptive bending system (Easy-Form series)
- · CNC crowning available
- · bending capacities: 80 to 640 ton
- · bending lengths: 1500 to 8000 mm



ToolCell



Full-featured hydraulic press brake with integrated automatic tool changing

- · Easy-Form® Laser adaptive bending system
- · bending capacities: 135 to 220 ton
- · bending lengths: 3060 to 4080 mm
- · ToolCell Plus: fit for higher tonnages per meter

Tandem press brake



Coupled press brakes of similar or dissimilar tonnage for extra-long bending lengths

- · tandem configuration
- · synchronised operation of machines via single CNC control
- · independent operation of each machine with separate control
- · custom configurations for Easy-Form and PPEB-H

PPEB-H



Configure-to-order press brake for L, XL and XXL special applications

- numerous configurable machine selections and automation options
- · CNC crowning
- · turbo hydraulics for high speed bending
- \cdot 400 ton x 4000 mm bending length to 3000 ton x 14000 mm

Synchro-Form



Award-winning adaptive bending technology for XXL profiles

- \cdot efficient and accurate bending of XXL profiles
- · automatic part positioning and manipulation
- angle measurement and compensation avoid accumulated error
- \cdot 400 ton x 4000 mm bending length to 3000 ton x 14000 mm

Dyna-Cell 40/15



Fast and cost-efficient robotic bending cell

- · electric-drive Dyna-Press Pro 40/15 press brake
- parts from 100 x 35 mm up to 600 x 400 mm, weighing up to 4 kg
- · universal auto-fit gripper engineered by LVD
- · available with Easy-Form® Laser adaptive bending system

Easy-Cell 80/25



Flexible and highly accurate robotic bending cell

- · hydraulic Easy-Form 80/25 press brake
- parts from 100 x 100 mm up to 1600 x 1200 mm, weighing up to 25 kg
- · multiple grippers, easy to change manually
- · Easy-Form® Laser adaptive bending system

Ulti-Form 135/30



Unique bending system delivering high productivity in a compact space

- · 135-ton 3-meter automated tool changing press brake
- parts from 100 x 100 mm up to 1200 x 800 mm, weighing up to 25 kg
- · universal auto-fit gripper engineered by LVD
- \cdot large output zone with pallet dispenser and conveyor system

Ulti-Form 220/40



Highly automated bending cell

- · 220-ton 4-meter automated tool changing press brake
- parts from 300 x 200 up to 3000 x 1250 mm, weighing up to 75 kg
- · automatic gripper change of up to 5 grippers
- · robot on track for handling large workpieces
- · preloading and part centering during bending

Press brake tooling



High-precision press brake tooling for standard and custom applications

- · progressive STONE radius on V-dies
- · induction hardened up to a minimum of 56 HRc
- standard and ToolCell-specific punches and dies, multi-V and adjustable dies; hemming tools
- · dies in Thyrotherm® for heavy-duty bending

Multifold panel bender



Cost-effective panel production

- · handling large-scale panels
- · full automation for high productivity
- \cdot one set of tools for a variety of profiles
- up to 2500 mm bending length, 400 mm height (Multifold 2540); up to 3200 mm bending length, 110 mm height (Multifold 3211)

CS shear



Reliable and cost-competitive shearing equipment for general shearing applications

- · motorised adjustment of cutting angle
- · blades with four cutting edges
- · standard blade suitable for mild and stainless steel
- sheet thickness/cutting length: 6.35 mm/3100 mm, 6.35 mm/4000 mm, 13 mm/3100 mm

MVS & HGS shears



Highly flexible shearing machines for virtually all shearing needs

- \cdot motorised adjustment of blade clearance and cutting angle
- · blades with four cutting edges
- · large throat gap permits overlap cutting
- sheet thickness/cutting length: 6.35 mm/3100 mm to 30 mm/6200 mm



CADMAN-FLOW



Connects all CADMAN® software modules, improving process flow

- \cdot single point of entry to the complete software suite
- · API for importing parts and production orders
- · automates your part programming workflow
- · provides real-time machine status
- · intuitively browse parts and their bend solutions

CADMAN-SDI



Smart Drawing Importer

- imports CAD-files per part, per batch or in watch mode in over 40 file types
- · visualises all cost drivers ready for export
- · repairs parts with BricsCAD®
- checks feasibility and estimates time for laser cutting, punching and bending
- · connects to ERP with XML communication

CADMAN-B



Achieves the correct unfolding first time and easily creates complex bending programs

- · determines the optimal bend sequence, tool and backgauge setup
- optimises tool setup across different parts: part sequence, tooling type and setup
- seamlessly links to CADMAN-L or P for the creation of a nesting and laser cutting or punching programs
- · calculates bending solutions per part, per batch or in watch mode


CADMAN-SIM



Smart programming software for LVD's robotised bending cells

- · automatically programs press brake, robot and gripper
- calculates bending solution, collision-free robot path and part handling
- · simulates the complete part production
- · no in-depth robot knowledge or robot teaching required

CADMAN-P/L



Uses the full potential of LVD laser cutting and punching machines

- enables file importation through simple drag and drop
- · simulates laser cutting (L) and punching process (P)
- smart features: optimised sheet utilisation, fly-cut, remnant creation, collision avoidance (L)
- tool expert defines punching and forming functions (P)
- · includes report module for time and cost calculation

CADMAN-JOB



Examines, filters and bundles production orders for a minimised setup

- · connects the central database, ERP system, CAM and workshop
- generates, classifies and groups jobs for all sheet metal fabrication operations
- provides all relevant production information for reverse calculations
- · visualises foreign operations such as tapping and deburring

Touch-i4



Powerful tablet collects real-time information and helps the operator sort and validate parts

- · KPI (Key Performance Indicators) history indication
- · future workload overview per work center
- Sort & Validate mode, location assignment according to production order
- · option to CADMAN-JOB